

# Double Crate Filler type CF 2090



## Typical application

To be used for high speed loading of products into plastic crates.

## Process

The product is pregrouped onto an accumulation table and then side indexed into the gripper mechanism which grips the product automatically creating two equal packs for loading into two crates.


The product is gently lowered into the crates while the next load of products is being pregrouped.

## Technical specifications

- Body section is constructed in stainless material.
- Packs up to 12000 1 litre per hour.
- Crate max width up to 500 mm.

## Dimensions (l\*w\*h)

- Crate Packer CF2090 2420 \* 1350 \* 1700
- Crate stacker 950 \* 1020 \* 1800

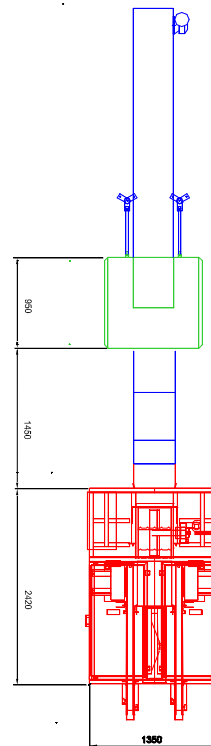

Footprint of in-line Crate Packer and Stacker

