

Pot Packer type PP 2010

For Cups and containers.



Typical application

To be used for loading yoghurt or desert type pots into crates or trays of any material.

Process

The product is conveyed into the machine on a suitable chain conveyor and pre-grouped according to the required packing pattern.


The products are lifted into the crates or trays with vacuum or gripper heads. Layer pads can be placed automatically between each layer. Different container dimensions or packing patterns are available by changing infeed guides and the vacuum head type.

Technical specifications

- Body section is constructed in stainless material.
- Packs up to 20 layer per minute
- Item width up to 500 mm.
- Automatic product detection.

Dimensions (l*w*h)

- Pot Packer 2685 * 1100 * 1885 mm
- Wrapper 1020 * 1000 * 1950 mm

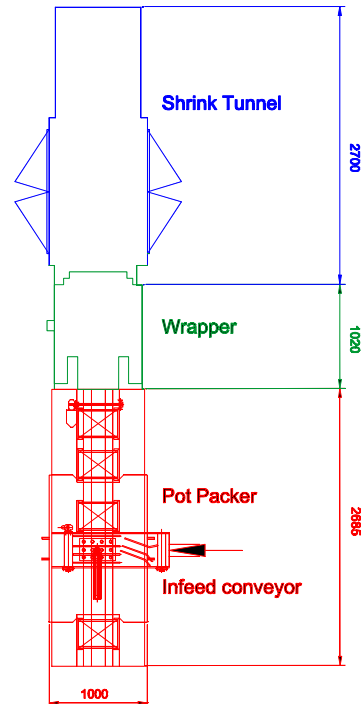

Typical installation shown with Ancram Shrink Wrap and Shrink Tunnel

